


All-In-One Kiosk Table/Wall Mount/Stand



Compact

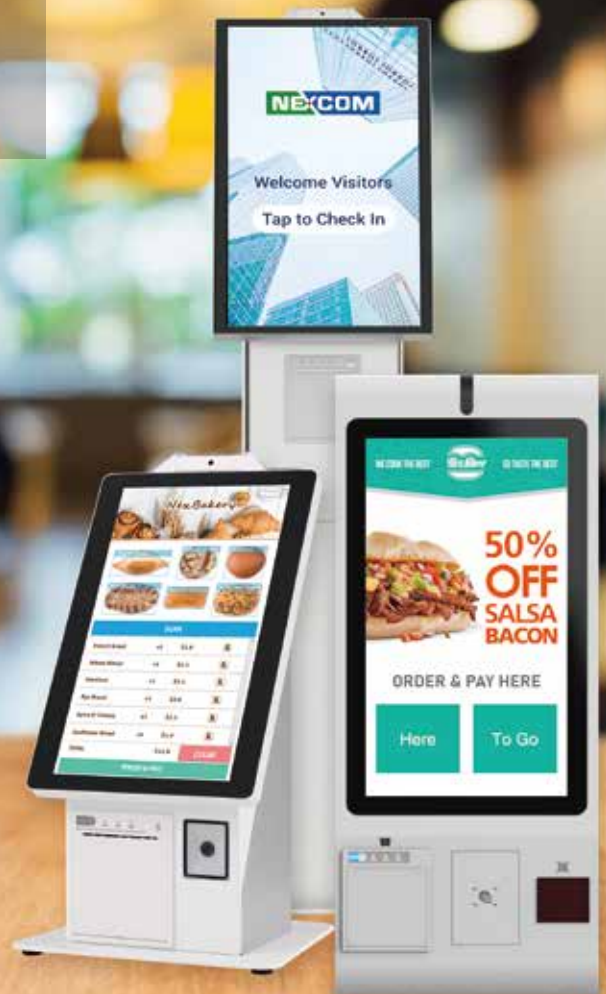

Optical Bonding



P-Cap Touch



Printer



Barcode Scanner



APP Ready



Rich Peripherals

neXService Self Service Kiosk

Enable the Digital Transformation in **Smart Retail**

neXService

Self Service Kiosk

Rich Peripherals

Reliable P-Cap Touch

Flexible Mounting Kit

Crystal Clear View of Display

- High Brightness of improved viewing experience
- Optical Bonding*1 to maximum dust & moisture protection
- Greater panel durability

* 1 neXService-1600 and neXService-2400

All-in-One Design

- P-Cap multi-touch with stable Intel® Celeron® J3455 platform
- Easy-open thermal printer to change paper roll easily
- Optional peripherals including barcode scanner, camera, NFC, RFID, EMV, MSR

Easy Maintenance

- Modular design to add components and upgrades.
- Four Steps for Wall-mount Rack Installation*2
- External USB and LAN port for flexible connectivity

* 2 neXService-2200 only

neXService Self Service Series Features



neXService-1600

- 15.6" TFT WXGA 10:16 table kiosk with Intel® Celeron® processor J3455
- 10 Points P-Cap multi-touch with IP65 protection on the front
- Built-in thermal printer, 1D/2D scanner

neXService-2200

- 21.5" TFT FHD 9:16 wall mount kiosk with Intel® Celeron® processor J3455
- 10 Points P-Cap multi-touch with slim bezel design
- Built-in thermal printer, 1D/2D scanner, camera
- Optional floor standing or wall mounting kit

neXService-2400

- 23.8" TFT FHD 9:16 table kiosk with Intel® Celeron® processor J3455
- 10 points P-Cap multi-touch with IP65 protection on the front
- Built-in thermal printer, 1D/2D scanner
- Optional floor stand



Compact



Optical Bonding



P-Cap Touch



Barcode Scanner



Printer



Rich Peripherals



APP Ready



Self Ordering

15.6"

21.5"

23.8"



AI Checkout



+

15.6"

23.8"



Queuing

15.6"

21.5"

23.8"






Hospitality

15.6"

21.5"

23.8"

neXService Series Specifications

Model				
		neXService-1600	neXService-2200	neXService-2400
Configuration				
Mainboard	Processor	Intel® Celeron® processor J3455, 1.50GHz, 2M cache		
	Memory	4GB DDR3L 1866 MHz, non-ECC and un-buffered memory		
	Storage	64GB M.2 2242 Key M SSD		
LCD Panel	Panel Size	15.6-inch LED panel	21.5-inch LED panel	23.8-inch LED panel
	Resolution	768 (V) x 1366 (H)	1080 (V) x 1920 (H)	1080 (V) x 1920 (H)
	Brightness	450 cd/m2	250 cd/m2	315 cd/m2
	View Angle	80°/80°/75°/75°	89°/89°/89°/89°	89°/89°/89°/89°
Touch Panel	Bezel Free	10 points P-Cap (projected capacitive touch), optical bonding	10 points P-Cap (projected capacitive touch)	10 points P-Cap (projected capacitive touch), optical bonding
In Front Control				
External I/O Interface	USB	2 x USB 2.0 type A		
	LAN	1 x Gigabit Ethernet		
	Power Cord Socket	1 x 110~240V AC power inlet		
	Power Button	1 x Power switch button		
Mechanical & Environmental				
	Dimension	252mm x 518mm x 230mm (W x H x D)	350mm x 824mm x 111mm (W x H x D)	338mm x 1486mm x 400mm (W x H x D)
	Weight	10.5 kgs	24 kgs	30 kgs
Operation System	OS	Win 10 64-bit/ Linux 4.1	Win 10 64-bit/Linux 4.1	Win 10 64-bit/Linux 4.1
Environment	Operation Condition	0°C to +50°C/ 10 to 90% without condensation	0°C to +50°C/ 20 to 80% without condensation	0°C to +50°C/ 10 to 90% without condensation
	Storage Condition	-20°C to +60°C/ 10 to 90% without condensation	-20°C to +60°C/ 20 to 85% without condensation	-20°C to +60°C/ 10 to 90% without condensation
Optional Accessories				
Thermal Printer		80mm standalone thermal printer with cutter 203 dpi and 180 mm/s supported		
1D/2D Barcode Scanner		640 x 480 CMOS	800 x 800 CMOS	640 x 480 CMOS
Face Camera		Optional, 2M-Pixel Full HD camera	Built-in, 2M-Pixel Full HD camera	Optional, 2M-Pixel Full HD camera
MSR/IC Card Reader		Optional, based on customer requirements		
Payment Mount Bracket		Optional, based on customer requirements		
More Options		Wi-Fi IEEE 802.11 a/b/g/n/ac (mini-PCIe type) or 3G/LTE module (mini-PCIe type)	Wi-Fi IEEE 802.11 a/b/g/n/ac (mini-PCIe type) or 3G/LTE module (mini-PCIe type), floor stand or wall mount kit	Wi-Fi IEEE 802.11 a/b/g/n/ac (mini-PCIe type) or 3G/LTE module (mini-PCIe type), floor stand kit
Ordering Information				
		<ul style="list-style-type: none"> neXService-1600 (P/N: 10W50160000X0) 15.6" WXGA LED P-CAP table kiosk neXService-1600S (P/N: 10W50160001X0) 15.6" WXGA LED P-CAP table kiosk, pre-load self ordering software neXService-1600Q (P/N: 10W50160002X0) 15.6" WXGA LED P-CAP table kiosk, pre-load queuing software package neXService-1600H (P/N: 10W50160003X0) 15.6" WXGA LED P-CAP table kiosk, pre-load visitor sign-in software neXService-1600A (P/N: 10W50160004X0) 15.6" WXGA LED P-CAP table kiosk, pre-load AI checkout camera kit and software 	<ul style="list-style-type: none"> neXService-2200 (P/N: 10W50220000X0) 21.5" FHD LED P-CAP kiosk, neXService-2200S (P/N: 10W50220001X0) 21.5" FHD LED P-CAP kiosk, pre-load self ordering software neXService-2200Q (P/N: 10W50220002X0) 21.5" FHD LED P-CAP kiosk, pre-load queuing software neXService-2200H (P/N: 10W50220003X0) 21.5" FHD LED P-CAP kiosk, pre-load visitor sign-in software 	<ul style="list-style-type: none"> neXService-2400 (P/N: 10W50240000X0) 23.8" FHD LED P-CAP kiosk neXService-2400Q (P/N: 10W50240002X0) 23.8" FHD LED P-CAP kiosk, pre-load queuing software package neXService-2400H (P/N: 10W50240003X0) 23.8" FHD LED P-CAP kiosk, pre-load visitor sign-in software